

PCT





9534170A1 INTERNATIONAL APPLICATION PUBLISHED (51) International Patent Classification 6: (11) International Publication Number: WU 95/341/U A1 H04N 7/173 (43) International Publication Date: 14 December 1995 (14.12.95) (81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, (21) International Application Number: PCT/US95/07290 CN, CZ, DE, DK, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, NO. 8 June 1995 (08.06.95) (22) International Filing Date: NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI (30) Priority Data: patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, 8 June 1994 (08.06.94) US 08/255,678 SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). (60) Parent Application or Grant Published (63) Related by Continuation 08/255,678 (CON) With international search report. US 8 June 1994 (08.06.94) Filed on (71) Applicant (for all designated States except US): FUTUREVI-SION OF AMERICA CORP. [US/US]; 200 Four Falls Corporate Center, West Conshohocken, PA 19428-2968 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): HELLHAKE, Paul [US/US]; 281 Woodland Drive, Downingtown, PA 19335 (74) Agents: NAVON, Jeffrey, M. et al.; Duane, Morris & Heckscher, One Liberty Place, Philadelphia, PA 19103-7396 (54) Title: INTERACTIVE BROADBAND MULTIMEDIA SYSTEM (57) Abstract A method and apparatus for facilitating interactive television PROVIDER is disclosed. The method for facilitating interactive television comprises the following steps: accessing an interactive program;

executing said interactive program; and providing an end user with a set of coded instructions which may be transmitted upstream.

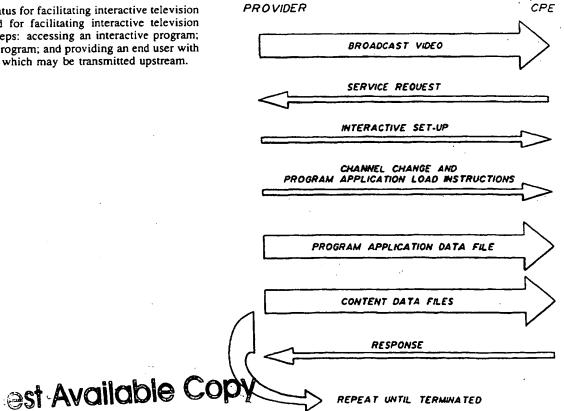

REPEAT UNTIL TERMINATED

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MD	Manustra et e
AU	Australia	GE	•	MR	Mauritania
BB	Barbados	GN	Georgia	MW	Malawi
BE			Guinea	NE	Niger
	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	TI	Italy	PL	Poland
BR	Brazil .	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada '.	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic	SD	Sudan
CG	Congo		of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	ΚZ	Kazakhstan	SK	Slovenia
CM	Cameroon	LI	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechosłovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	-
DE	Germany	MC	Monaco	TT	Tajikistan
DK	Denmark	MD	Republic of Moldova		Trinidad and Tobago
ES	Spain	MG	Madagascar	UA	Ukraine
FI	Finland	ML	Mali	US	United States of America
				UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

- 1 -

INTERACTIVE BROADBAND MULTIMEDIA SYSTEM

Field of the Invention

The present invention is directed to interactive television systems. In particular, the present invention is directed to interactive television systems which facilitate the transmission of control signals through interactive media, and which can be delivered to an end user station such as a television receiver or computer work station.

5

1.0

15

20

Background of the Invention

The present invention is directed to interactive television systems. In particular, the present invention is directed to interactive television systems which may be used to facilitate two-way communication between an end user and a provider center or service and which can be used to broadcast data files which may be accessed by a locally stored program to be displayed on a monitor as one or more presentations. The prior art has disclosed systems and devices which facilitate interactive television presentations.

Such prior art systems are characterized by the inclusion of dedicated phone or transmission lines or expensive hardware.

PCT/US95/07290

5

10

15

20

25

The use of such dedicated systems drastically increases the cost associated with the use of such systems.

The PRODIGY® information service, which is marketed widely by Sears® and IBM® claims to use a distributed database architecture. However, that system only distributes the database to regional main frame computers. The underlying technology still relies on the maintenance of continuous real time two-way communication by a personal computer. Nearly all videotex services use phone lines and modems to link the two, although some experiments with two-way cable television and other media have been attempted. Such systems have exhibited numerous limitations.

Because each user of a traditional videotex system is directly connected to a central main frame computer when "online", the central computer must be capable of simultaneously handling the many subscribers it gets during prime usage periods. The central computer may sit idle the rest of the time. If there is a problem with a central computer or communications net linking it to the end users, the entire system may cease functioning. Thus, prior art systems have typically relied upon a computer/print interfaces.

The speed with which information may be retrieved in such systems is limited to the speed with which the central computer can recognize a user's request and locate the information in a central data storage media. Even the largest and fastest of central computers cannot overcome the limitations of how quickly information may be carried by the phone lines or other media that connect it to the user. Phone lines typically have a narrow

0

.5

:0

:5

bandwidth and can carry only a limited amount of information. Typical phone line communications are limited to a speed of 2400 band.

The newer Integrated Services Digital Network (ISDN) and fiber optic cable technologies provide greater information transmission capability. However, even with high speed fiber optics which connect the central computer to a home terminal, the largest computers cannot keep up with an entire city, particularly during prime hours. These systems rely upon the single interaction of a computer and computer

The bandwidth issue has never been adequately addressed because until recently all computer interfaces were just character-based or used very low resolution alpha mosaic-style displays utilizing protocol such as NAPLPS or TELETEL. Because these systems do not use attractive graphical interfaces, they are not pleasing to the eye. Graphical user interfaces have become very popular because they are far more interesting and easier to use. Such systems utilize much more memory storage space.

There are a number of prior art patents directed to interactive communications systems. U.S. Patent Nos. 5,093,718 and 5,220,420 are directed to Interactive Home Information Systems. These patents disclose systems which incorporate a nodal structure which feeds in a broadband signal. The nodes are dedicated computers which reside outside of a house or group of houses. The nodes couple to head end computer which is preferably an industrial microprocessor-based controller with high capacity magnetic or optic read/write storage devices.

10

15

20

25

U.S. Patent No. 5,233,436 discloses an interactive video system having a display for displaying camouflaged information which is discernible only when viewed through a partially transparent viewing screen having zones with light transmission characteristics corresponding to the characteristic of respective displayed image regions. The user of the system is required to input information which can be derived only by recognizing the camouflaged information with the aid of the screen.

Finally, U.S. Patent No. 4,745,559 discloses a data transmission system in which data templates are downloaded so as to facilitate data transmission and storage. This patent uses a system in which storage templates are locally retrieved and are associated with a unique identifier. The database records are stored locally and are updated from a remote location.

Each of the above systems requires dedicated hardware as shown for example in U.S. Patent Nos. 5,093,718 and 5,220,420 or the maintenance of a locally stored database. It would be desirable to provide a system in which interactive data could be broadcast to many customer premise equipment devices (CPE). Such devices could obtain control, graphical and audio data by recognizing and accepting specific data files within broadcast data streams and acting upon the data files such that the viewer would achieve the simulation of an interactive television system. The system would broadcast data files which would be selectively retrieved by the individual viewer on a CPE. The files would be broadcast to all CPE'S in the system. The executing program could become resident and active at the CPE by being loaded from a data stream within a broadcast video channel; a data stream

10

15

20

25

within a broadcast data channel; a pointcast data signal directed to a specific CPE or memory storage within the CPE. End user responses could be transmitted back to the provider using the network return data path. In this way, new files could be broadcast through the system such that the system could access the new information.

Summary of the Invention

The present invention is directed to a method for facilitating interactive television by an end user comprising the following steps: accessing a computer program for an interactive television display; executing said interactive program so as to provide at least one screen display; and providing a set of broadcast data files which may be accessed by said interactive program.

In a preferred embodiment, the present invention is directed to an apparatus for facilitating interactive television comprising: means for accessing an interactive television application program and presentation a plurality of broadcast data files; and means for controlling said program and broadcast files broadcast on a television monitor.

In yet a further embodiment, the present invention is directed to an apparatus for facilitating interactive television comprising: means for processing an interactive television application program said program being pre-stored in said computer memory; means for accessing broadcast data files, each of said files corresponding to a presentation, and having an identification system associated therewith; and means associated with said end user station for transmitting a set of instructions

-6-

to a remote location to control the broadcast of new data files.

Brief Description of the Figures

Figure 1 is a perspective view of an interactive control system in accordance with the present invention.

Figure 2 is a block diagram of an interactive television system in accordance with the present invention.

Figure 3 is a block diagram of an enhanced interactive television system in accordance with the present invention.

Figure 3A is a block diagram of an enhanced interactive system in accordance with the present invention which utilizes a computer and monitor as a presentation system.

Figure 4 is a block diagram of an enhanced television network system in accordance with the present invention.

Figure 5 is a flow chart of an interactive service in accordance with the present invention.

Figures 6 - 8 are screen displays in accordance with the present invention.

Detailed Description of the Preferred Embodiment

The present invention is described with reference to the enclosed Figures wherein the same numbers are utilized where applicable. In a broadest embodiment, the present invention is directed to a network having downstream broadcast capabilities, upstream interactive communication capability and a microprocessor-based CPE (Customer Premise Equipment) capable of loading and executing a core program and accessing broadcast data files. The present invention accesses specific data files which are broadcast and which correspond to video, textual and/or audio presentation.

5

10

15

20

5

5

Referring to Figure 1, an interactive system of the present invention is described. As shown, in a most preferred embodiment of the present invention, the system 10 of the present invention is utilized in association with a television monitor 12 and end user control 13. End user control 13 may be accessed via a handheld infrared controller 14. The system 10 of the invention, in a first embodiment, is housed in a control box or customerpremised equipment (CPE) 14. The box 14 is preferably a set-top control box connected to the television. The control box 14 is controlled by IR controller 15. In a most preferred embodiment shown in Figure 4, the CPE 14 comprises a CPU central processor 16, memory 18, I/O ports 20 and operating system 21. The CPE accesses data files which are broadcast.

The control box 14 or customer-premised equipment (CPE) includes circuitry for facilitating the receipt and storage of an interactive core program. As shown in Figures 2 and 3, the control mechanism in a preferred embodiment is a microprocessor-based control system. The system incorporates microprocessor 16, RAM 18 which processes a core program and chooses broadcast data files and an input/output device 20 which transmits commands to the set-top control box. As shown in Figure 3, the device may include a modem 24 connected to the broadcast center 22 via a telephone line 26. The modem can connect to a broadcast center such that a new program or set of data files can be broadcast. As shown in Figure 3A, the end user system may comprise a computer and monitor 29 rather than a television receiver. The present invention contemplates accessing a core program which facilitates the receipt and control of data files. Each data

-8-

file represents a presentation.

The present invention contemplates several mechanisms for delivering the core program data to the CPE 14. Initially, the core program may reside on the CPE 14. In addition, the program may be transmitted from a data stream within a broadcast data signal associated with a broadcast video channel. Alternatively, the CPE device 14 may be switched to a broadcast data channel and the program pointcast from a data stream within the broadcast channel.

The core program identifies, loads and executes specific data files which are broadcast. The data files are displayed as textual information still visual audio information based upon specific control elements within the data file. The data files are broadcast. The program may need to switch among different broadcast channels in order to locate the desired data files.

In a preferred embodiment, the data files are obtained by the core program from a broadcast data signal associated with a broadcast video channel and a broadcast data signal associated with a broadcast data channel. The core program is instructed which data file identification number (ID) to identify and execute by the previous executed data file or a control command from the provider delivered by the network's interactive communications system. Hence, the core program facilitates the receipt of files from the broadcast.

When the beginning of the desired data file is identified in the broadcast data stream, for example, by a header ID, that file is acted upon by the program application. Each file will typically contain a still frame image and software for

5

10

15

20

controlling the selection of new files broadcast. Thus, for example, a presentation is provided which queries the user to make an additional selection. The user may select the core program will then search for the selection from the broadcast data files. The file selected will be identified by its file ID and then the video element displayed on the monitor. The program control elements of the data file provide the program application with the instructions necessary to act upon the other elements of the data file. The instructions may indicate that the video element is to be displayed in full or partial screen with a repeating audio element for a specified amount of time.

10

15

20

25

The number, placement, size of user interface buttons would also be indicated along with the action to be taken upon button selection. Actions may include executing an audio element, displaying a text element, loading and executing additional data files. The actions are activated with the controller. The files may be compressed such using MPEG or other compression technology. In the case of an MPEG compression system, six megabits of data may be transmitted per second. A data file will variable in byte size. Thus over 60 files may be transmitted per second. The core program will identify files by the respective file ID as different files are requested, additional files will be identified by the program. Thus if the file ID is called for, the program will the presentation.

During the program application execution, end user responses are communicated upstream via the instructive call communication return path. This return path may comprise the CATV cable. Alternatively, the path may also comprise a modem dialer affixed

-10-

to the phone system at the local premises which transmits messages to the central station.

The upstream return instruction is coded to identify all data files being accessed and the end user response thereto. The return information may be used to collect usage, statistics, notification and user requests or purchases. Additionally, the information transmitted by the CPE may dynamically adjust the frequency OF which a specific data file is broadcast by the broadcast data file server. Hence, if subscribers don't request certain information on a frequent enough basis, those files can be deleted from the system.

It is to be noted that the frequency with which a specific data file is delivered in the broadcast stream may be varied based upon an algorithm which determines the likelihood of need by any CPE. The core program may be instructed to identify and load a specific data file prior to it being needed based upon an algorithm which determines the likelihood it will be needed by the core program.

Figure 4 comprises a more detailed embodiment of the present invention as applied to a communication network. As shown, the system in a most preferred embodiment comprises three principal regions: the home/business; the transport network and the digital integration center. The home or business includes the set top/local server (CPE) 14, an MPEG (decoder) 17, CPU 16, memory 18, ports 20 and operating system 21. While the invention is shown in the context of an MPEG compression system, it is to be appreciated that other compression technologies may be used with the present invention.

5

10

15

20

-11-

The local CPE 14 communicates with a transport network including host digital terminal 31, a central office 33 and a Level I gateway 35. The host digital terminals are in communication with the gateway 35, CPE 14 and central office 37. The Level 1 Gateway 35 includes a network controller 36, video administration module 38 and statistics module 40.

5

10

15

20

25

The third major element is the digital integration center 42. This element includes the API (Applications Program Interface) 44 which includes the level II gateway server 46, text server 48, interactive response server 50, channel provisioning system (EPIC) 52, network coordinator 54 and statistics databases 56. The center 42 may include satellite receivers 58, off-air receivers 60, local origination 62, NVOD players 64, a multimedia applications server 66 and VOD (Video On Demand) server 68. The center also includes an MPEG encoder 70 and ATM encoder and MUX The digital integration center functions as the central broadcast center which broadcasts the data files through the central office and to the individual homes or businesses in the system. The end user may access an interactive presentation via the hand-held controller 15. The core program will be activated. The broadcast signal coming through the home/business will include files which will be accessible through the CPE 14.

Figure 5 is a flow diagram which displays the operation of the present invention. As shown, a provider transmits a broadcast video signal. A subscriber who desires to engage an interactive session transmits a service request via the hand-held IR controller or by activating buttons on the CPE. The provider then establishes an interactive response session and for example,

-12-

instructs the CPE to perform a channel change and program application load instructions. The program application data file and the content data files are transmitted to the CPE via a broadcast signal. The subscriber can then query the provider for additional presentations which will be broadcast from the center.

Referring to Figures 6 through 8, examples of interactive presentations are shown and disclosed. Initially, the subscriber will input the interactive command in the controller. This can be accomplished by sending a signal or command to down-load the interactive presentation. The command can be input either with the hand-held tuner or by the activation of a button on the control box or CPE. In the following example there are three interactive presentations which are presented on the television monitor. A first is for the Asbury Park Press. A second is for the Franklin Mint. The third is for SHOP RITE Supermarkets.

Each of the presentations has an associated file number which is used to identify the presentation in the broadcast stream.

Referring to Figure 6, the screen for the Franklin Mint is disclosed. The screen shows an advertisement for the Franklin Mint with a plurality of access items including an on-line catalog, a satisfaction guarantee, ordering and shipping information as well as a screen for new information.

The user will activate the particular presentation desired which will draw in a broadcast data. The presentation selected may be displayed. Additional screens may be accessed from the broadcast and shown on the screen. Further information may be accessed by transmitting a signal upstream. Additional

5

10

15

20

-13-

information may then be broadcast to the CPE 14. It is to be noted that information does not have to be received upstream before the next file is accessed.

Figure 8 provides an example for incorporating a newspaper such as the Asbury Park Press into the system. In this example, the Asbury Press would provide a series of interactive presentations to subscribers of the system. These interactive presentations could include, for example, merchandise, pets, services, personals, real estate and transportation. A subscriber who, for example, desires to view a real estate presentation will activate the real estate command via the handheld controller.

5

10

15

20

25

A real estate presentation will then be shown to a subscriber on the TV monitor. If additional information is requested, a command can then be transmitted on the return path, by the IR controller for example. The command alternatively could be transmitted via a modem, and additional presentations may then be broadcast and presented on the screen.

In yet a further example, a consumer may watch a program such as "CNN Money Line" in which a well known mutual fund manager may be describing the investment strategy of the fund. A text overlay will be displayed querying the consumer if he would like to have additional information via an interactive application.

By responding affirmatively using the remote control 15, the present invention will automatically switch the user to the application and later switch the consumer back to the original program when he is finished with the application. During the

PCT/US95/07290

5

10

15

application, additional information can be given to the consumer is broadcast to the consumer in the form of files. If the consumer transmits a signal upstream, information on the consumer can be collected and transactions can be completed.

The examples of effective uses include services, products, information, insurance, travel. The ability to target interactive promotions, advertisements, and marketing efforts is enormous. The invention can identify consumers by demographics,

geography, or programming viewing preferences.

The present invention has been described with reference to the above-detailed description. It is to be appreciated that other embodiments fulfill the spirit and scope of the present invention and that the true nature and scope of the present invention is to be determined with reference to the claims appended hereto.

-15-

Claims

1. A method for facilitating interactive television by an end user comprising the following steps:

accessing a computer program for an interactive television display;

executing said interactive program so as to provide at least one screen display; and

providing a set of broadcast data files which may be accessed by said interactive program.

The method of claim 1 wherein said set of data files
 is transmitted on the vertical blanking interval of the video

signal transmitted to said television.

3. The method of claim 1 wherein said interactive program is pre-stored in a computer memory associated with the end user.

- 4. The method of claim 1 wherein the interactive program is transmitted on a second broadcast channel.
- 5. Apparatus for facilitating interactive television comprising:

means for accessing an interactive television application program and presentation a plurality of broadcast data files; and

means for controlling said program and broadcast files broadcast on a television monitor.

5

20

15

-16-

- 6. Apparatus for facilitating an interactive television session of claim 5 wherein said interactive presentation resides on a computer memory.
- 7. Apparatus for facilitating interactive television of claim 6 wherein said presentation is transmitted on a broadcast signal.
- 8. Apparatus of claim 7 wherein said data signal is transmitted through the vertical blanking interval.
 - 9. Apparatus of claim 7 wherein said signal is broadcast to a second broadcast channel.
- 10. Apparatus for facilitating interactive television comprising:

means for processing an interactive television application program said program being pre-stored in said computer memory;


means for accessing broadcast data files, each of said files corresponding to a presentation, and having an identification system associated therewith; and

means associated with said end user station for transmitting a set of instructions to a remote location to control the broadcast of new data files.

11. The apparatus of claim 10 wherein said end user station is a television receiver.

12. The apparatus of claim 10 wherein said end user station is a computer and monitor.

1/9

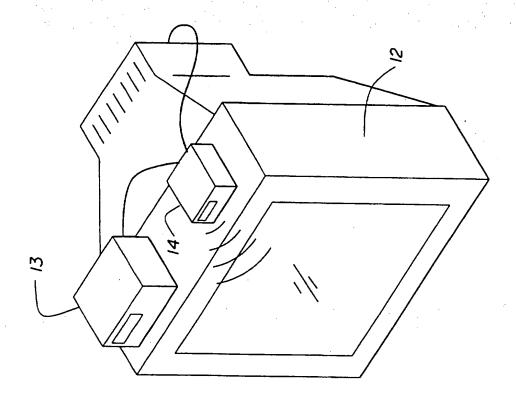


9







2/9

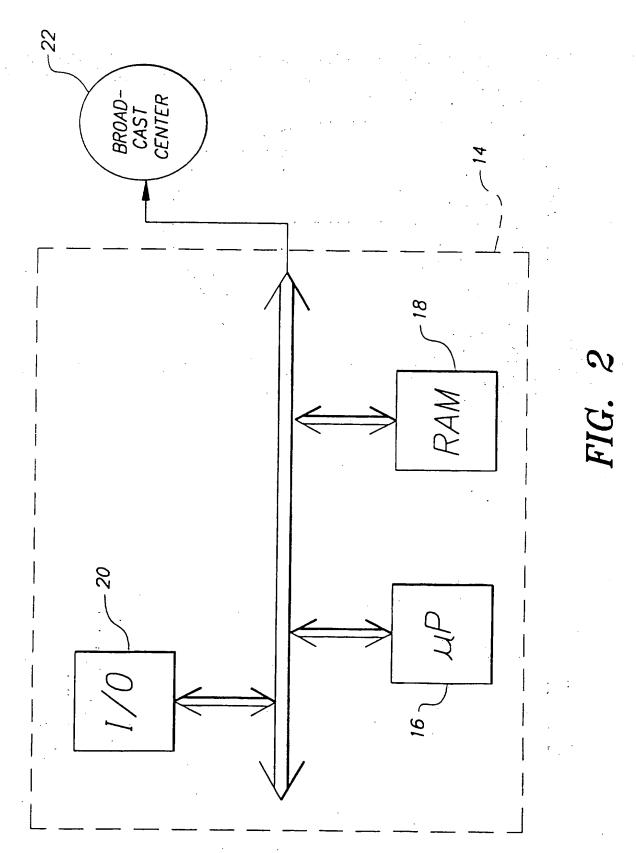

SUBSTITUTE SHEET (RULE 26)

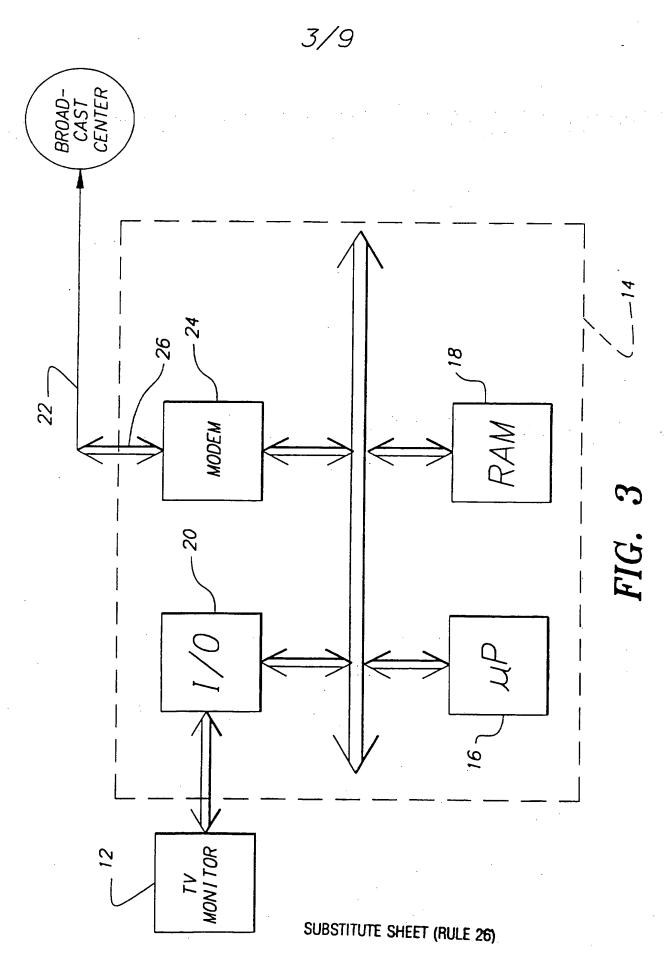

4/9 BROAD-CAST CENTER -26 22 -MODEM 20 COMPUTER MON! TOR 29-

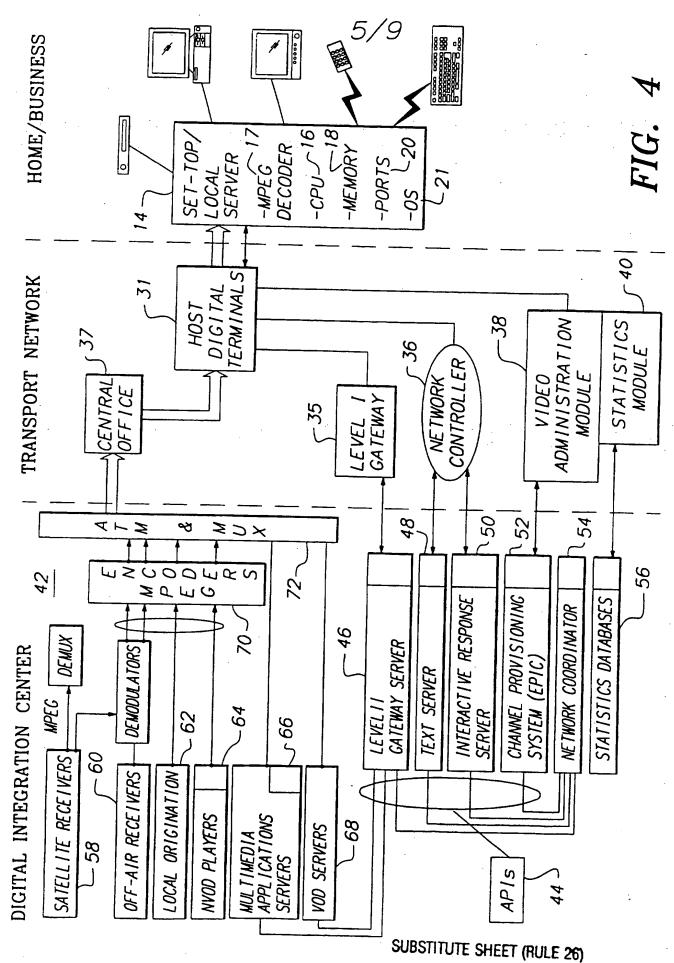

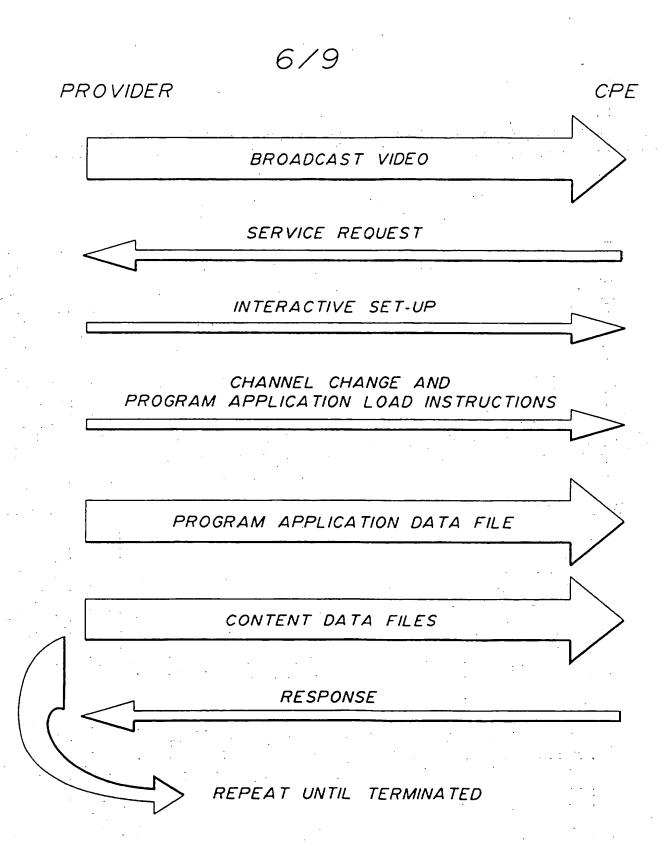


FIG. 5

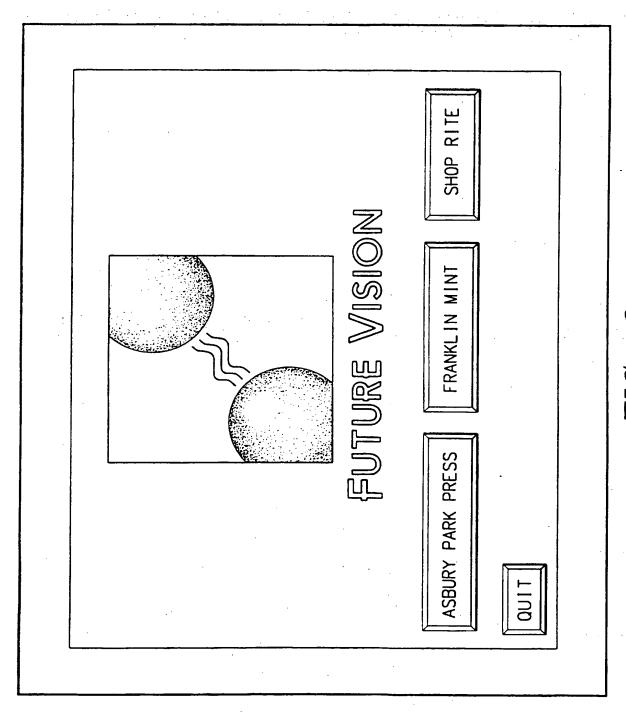


FIG. 6


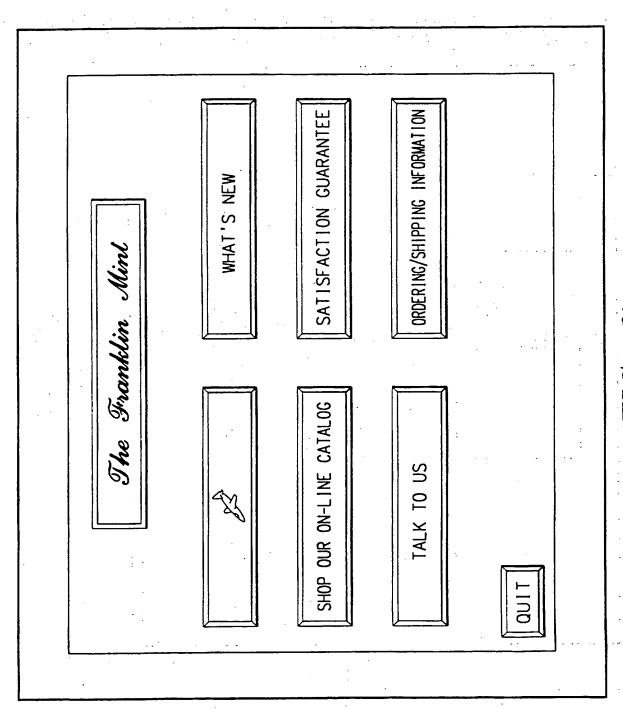


FIG. 7

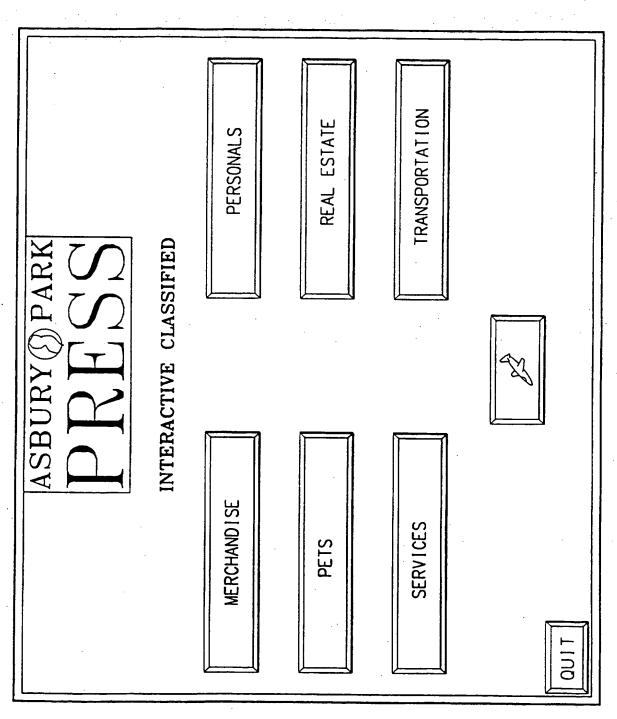

 $FIG. \ \theta$

INTERNATIONAL SEARCH REPORT

International application No. PCT/US95/07290

·	FCL	/0393/07290
A. CLASSIFICATION OF SUBJECT MATTER		
IPC(6) :H04N 7/173 US CL :Please See Extra Sheet.		-
According to International Patent Classification (IPC) or to	hoth national alassification and ID	· C
B. FIELDS SEARCHED	cour national classification and IP	
Minimum documentation searched (classification system foll	aved by classification and 1	
U.S. Please See Extra Sheet.	owed by classification symbols)	
Documentation searched other than minimum documentation t	o the extent that such documents ar	e included in the fields combad
		and the fields scalelled
		,
Electronic data base consulted during the international search	n (name of data base and, where p	racticable, search terms used)
		·
C. DOCUMENTS CONSIDERED TO BE RELEVAN	r	· · · · · · · · · · · · · · · · · · ·
		· ·
wild nideation, wild	e appropriate, of the relevant pass	ages Relevant to claim No.
US, A, 5,014,125 (POCOCK ET	Г AL) 7 May 1991, co	l. 18, 1-12
lines 3-23.	, , , , , , , , , , , , , , , , , , , ,	
P US. A. 5 357 276 (BANKER ET		
· OULTO COUNTY OF THE PROPERTY OF THE PROPER	AL) 18 October 1994	, see 1-12
whole document and figures 1,	2a, 2b, 3, and 5a.	
·		
e la companya di managana di m		
		· ·
^		
	·	
·	· ·	·
		•]
7		
Further documents are listed in the continuation of Box	C. See patent family as	nnex.
Special categories of cited documents:	T leter document published aff	er the international filing date or priority
document defining the general state of the art which is not considered to be part of particular relevance	principle or theory underly	the application but cited to understand the ag the invention
earlier document published on or after the international filing date	"X" document of particular rela	vance; the claimed invention cannot be se considered to involve an inventive step
document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other	winds the document is taken	alone
abacant season (as abscrited)	COMMISSION TO STANKS WE	vance; the claimed invention cannot be inventive step when the document is
moses	combined with one or more being obvious to a person sk	other such decrepants such combination
document published prior to the international filing date but later than the priority date claimed	'&' document member of the sec	f .
te of the actual completion of the international search	Date of mailing of the internation	
0 JULY 1995	22SEP19	995
0 10F1 TAX3	& BOLF IS	
me and mailing address of the ISA/US commissioner of Patents and Trademarks	Authorized officer	
ox PCT	JOHN W. MILLER	
/ashington, D.C. 20231 simile No. (703) 305-3230		
n PCT/ISA/210 (second sheet)(July 1992)*	Telephone No. (703) 305-47	00

INTERNATIONAL SEARCH REPORT

international application No. PCT/US95/07290

A. CLASSIFICATION OF SUBJECT MATTER: US CL :

348/7, 13; 455/4.2, 5.1

B. FIELDS SEARCHED
Minimum documentation searched
Classification System: U.S.

348/6, 7, 8, 10, 11, 12, 13; 455/3.1, 3.2, 3.3, 4.1, 4.2, 5.1, 6.1, 6.2, 6.3; H04N 7/16, 7/169, 7/173

Form PCT/ISA/210 (extra_sheet)(July 1992)*

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



REPEAT UNTIL TERMINATED

(51) International Patent Classification 6:		JNDER THE PATENT COOPERATION TREATY (PCT)
H04N 7/173	A1	(11) International Publication Number: WO 95/34170
		(43) International Publication Date: 14 December 1995 (14.12.95)
(21) International Application Number: PCT/USS (22) International Filing Date: 8 June 1995 (0) (30) Priority Data: 08/255,678 8 June 1994 (08.06.94)		CN, CZ, DE, DK, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI
(60) Parent Application or Grant (63) Related by Continuation US Filed on 8 June 1994 (0		
(71) Applicant (for all designated States except US): FUT SION OF AMERICA CORP. [US/US]; 200 Four Faporate Center, West Conshohocken, PA 19428-2960	alls Cor	<u>-</u>
(72) Inventor; and (75) Inventor/Applicant (for US only): HELLHAKE [US/US]; 281 Woodland Drive, Downingtown, PA (US).	E, Pau A 1933	1 5
(74) Agents: NAVON, Jeffrey, M. et al.; Duane, M. Heckscher, One Liberty Place, Philadelphia, PA 1916 (US).	orris <i>&</i> 03-7396	¢ 5 1
(54) Title: INTERACTIVE BROADBAND MULTIMEDIA	A SYST	TEM ·
(57) Abstract		
A method and apparatus for facilitating interactive televis disclosed. The method for facilitating interactive televicomprises the following steps: accessing an interactive program; and providing an end user a set of coded instructions which may be transmitted upstream	ision gram; with	PROVIDER CPE
•		•
		SERVICE REQUEST
		INTERACTIVE SET-UP
		INTERACTIVE SET-UP CHANNEL CHANGE AND
		INTERACTIVE SET-UP CHANNEL CHANGE AND
		CHANNEL CHANGE AND PROGRAM APPLICATION LOAD INSTRUCTIONS

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
ΑU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria _	IE	Ireland	NZ	New Zealand
BJ	Benin	П	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic	SD	Sudan
CG	Congo		of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia
CM	Cameroon	LI	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Larvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	ÜA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon			•••	***************************************

PCT/US95/07290

WO 95/34170

-1-

INTERACTIVE BROADBAND MULTIMEDIA SYSTEM

Field of the Invention

The present invention is directed to interactive television In particular, the present invention is directed to interactive television systems which facilitate the transmission of control signals through interactive media, and which can be delivered to an end user station such as a television receiver or computer work station.

5

10

15

20

Background of the Invention

The present invention is directed to interactive television In particular, the present invention is directed to interactive television systems which may be used to facilitate two-way communication between an end user and a provider center or service and which can be used to broadcast data files which may be accessed by a locally stored program to be displayed on a monitor as one or more presentations. The prior art has disclosed systems and devices which facilitate interactive television presentations.

Such prior art systems are characterized by the inclusion

of dedicated phone or transmission lines or expensive hardware. The use of such dedicated systems drastically increases the cost associated with the use of such systems.

The PRODIGY® information service, which is marketed widely by Sears® and IBM® claims to use a distributed database architecture. However, that system only distributes the database to regional main frame computers. The underlying technology still relies on the maintenance of continuous real time two-way communication by a personal computer. Nearly all videotex services use phone lines and modems to link the two, although some experiments with two-way cable television and other media have been attempted. Such systems have exhibited numerous limitations.

Because each user of a traditional videotex system is directly connected to a central main frame computer when "online", the central computer must be capable of simultaneously handling the many subscribers it gets during prime usage periods. The central computer may sit idle the rest of the time. If there is a problem with a central computer or communications net linking it to the end users, the entire system may cease functioning. Thus, prior art systems have typically relied upon a computer/print interfaces.

The speed with which information may be retrieved in such systems is limited to the speed with which the central computer can recognize a user's request and locate the information in a central data storage media. Even the largest and fastest of central computers cannot overcome the limitations of how quickly

5

10

15

20

-3-

information may be carried by the phone lines or other media that connect it to the user. Phone lines typically have a narrow bandwidth and can carry only a limited amount of information. Typical phone line communications are limited to a speed of 2400 band.

5

10

15

20

25

The newer Integrated Services Digital Network (ISDN) and fiber optic cable technologies provide greater information transmission capability. However, even with high speed fiber optics which connect the central computer to a home terminal, the largest computers cannot keep up with an entire city, particularly during prime hours. These systems rely upon the single interaction of a computer and computer

The bandwidth issue has never been adequately addressed because until recently all computer interfaces were just character-based or used very low resolution alpha mosaic-style displays utilizing protocol such as NAPLPS or TELETEL. Because these systems do not use attractive graphical interfaces, they are not pleasing to the eye. Graphical user interfaces have become very popular because they are far more interesting and easier to use. Such systems utilize much more memory storage space.

There are a number of prior art patents directed to interactive communications systems. U.S. Patent Nos. 5,093,718 and 5,220,420 are directed to Interactive Home Information Systems. These patents disclose systems which incorporate a nodal structure which feeds in a broadband signal. The nodes are dedicated computers which reside outside of a house or group of

houses. The nodes couple to head end computer which is preferably an industrial microprocessor-based controller with high capacity magnetic or optic read/write storage devices.

U.S. Patent No. 5,233,436 discloses an interactive video system having a display for displaying camouflaged information which is discernible only when viewed through a partially transparent viewing screen having zones with light transmission characteristics corresponding to the characteristic of respective displayed image regions. The user of the system is required to input information which can be derived only by recognizing the camouflaged information with the aid of the screen.

Finally, U.S. Patent No. 4,745,559 discloses a data transmission system in which data templates are downloaded so as to facilitate data transmission and storage. This patent uses a system in which storage templates are locally retrieved and are associated with a unique identifier. The database records are stored locally and are updated from a remote location.

Each of the above systems requires dedicated hardware as shown for example in U.S. Patent Nos. 5,093,718 and 5,220,420 or the maintenance of a locally stored database. It would be desirable to provide a system in which interactive data could be broadcast to many customer premise equipment devices (CPE). Such devices could obtain control, graphical and audio data by recognizing and accepting specific data files within broadcast data streams and acting upon the data files such that the viewer would achieve the simulation of an interactive television system. The system would broadcast data files which would be selectively

5

10

15

20

-5-

retrieved by the individual viewer on a CPE. The files would be broadcast to all CPE'S in the system. The executing program could become resident and active at the CPE by being loaded from a data stream within a broadcast video channel; a data stream within a broadcast data channel; a pointcast data signal directed to a specific CPE or memory storage within the CPE. End user responses could be transmitted back to the provider using the network return data path. In this way, new files could be broadcast through the system such that the system could access the new information.

5

10

15

20

25

Summary of the Invention

The present invention is directed to a method for facilitating interactive television by an end user comprising the following steps: accessing a computer program for an interactive television display; executing said interactive program so as to provide at least one screen display; and providing a set of broadcast data files which may be accessed by said interactive program.

In a preferred embodiment, the present invention is directed to an apparatus for facilitating interactive television comprising: means for accessing an interactive television application program and presentation a plurality of broadcast data files; and means for controlling said program and broadcast files broadcast on a television monitor.

In yet a further embodiment, the present invention is directed to an apparatus for facilitating interactive television comprising: means for processing an interactive television

-6-

application program said program being pre-stored in said computer memory; means for accessing broadcast data files, each of said files corresponding to a presentation, and having an identification system associated therewith; and means associated with said end user station for transmitting a set of instructions to a remote location to control the broadcast of new data files.

Brief Description of the Figures

Figure 1 is a perspective view of an interactive control system in accordance with the present invention.

Figure 2 is a block diagram of an interactive television system in accordance with the present invention.

Figure 3 is a block diagram of an enhanced interactive television system in accordance with the present invention.

Figure 3A is a block diagram of an enhanced interactive system in accordance with the present invention which utilizes a computer and monitor as a presentation system.

Figure 4 is a block diagram of an enhanced television network system in accordance with the present invention.

Figure 5 is a flow chart of an interactive service in accordance with the present invention.

Figures 6 - 8 are screen displays in accordance with the present invention.

Detailed Description of the Preferred Embodiment

The present invention is described with reference to the enclosed Figures wherein the same numbers are utilized where applicable. In a broadest embodiment, the present invention is directed to a network having downstream broadcast capabilities,

5

10

15

20

-7-

upstream interactive communication capability and a microprocessor-based CPE (Customer Premise Equipment) capable of loading and executing a core program and accessing broadcast data files. The present invention accesses specific data files which are broadcast and which correspond to video, textual and/or audio presentation.

5

10

15

20

25

Referring to Figure 1, an interactive system of the present invention is described. As shown, in a most preferred embodiment of the present invention, the system 10 of the present invention is utilized in association with a television monitor 12 and end user control 13. End user control 13 may be accessed via a handheld infrared controller 14. The system 10 of the invention, in a first embodiment, is housed in a control box or customerpremised equipment (CPE) 14. The box 14 is preferably a set-top control box connected to the television. The control box 14 is controlled by IR controller 15. In a most preferred embodiment shown in Figure 4, the CPE 14 comprises a CPU central processor 16, memory 18, I/O ports 20 and operating system 21. The CPE accesses data files which are broadcast.

The control box 14 or customer-premised equipment (CPE) includes circuitry for facilitating the receipt and storage of an interactive core program. As shown in Figures 2 and 3, the control mechanism in a preferred embodiment is a microprocessor-based control system. The system incorporates microprocessor 16, RAM 18 which processes a core program and chooses broadcast data files and an input/output device 20 which transmits commands to the set-top control box. As shown in Figure 3, the device may

include a modem 24 connected to the broadcast center 22 via a telephone line 26. The modem can connect to a broadcast center such that a new program or set of data files can be broadcast. As shown in Figure 3A, the end user system may comprise a computer and monitor 29 rather than a television receiver. The present invention contemplates accessing a core program which facilitates the receipt and control of data files. Each data file represents a presentation.

The present invention contemplates several mechanisms for delivering the core program data to the CPE 14. Initially, the core program may reside on the CPE 14. In addition, the program may be transmitted from a data stream within a broadcast data signal associated with a broadcast video channel. Alternatively, the CPE device 14 may be switched to a broadcast data channel and the program pointcast from a data stream within the broadcast channel.

The core program identifies, loads and executes specific data files which are broadcast. The data files are displayed as textual information still visual audio information based upon specific control elements within the data file. The data files are broadcast. The program may need to switch among different broadcast channels in order to locate the desired data files.

In a preferred embodiment, the data files are obtained by the core program from a broadcast data signal associated with a broadcast video channel and a broadcast data signal associated with a broadcast data channel. The core program is instructed which data file identification number (ID) to identify and

5

10

15

20

-9-

execute by the previous executed data file or a control command from the provider delivered by the network's interactive communications system. Hence, the core program facilitates the receipt of files from the broadcast.

5

10

15

When the beginning of the desired data file is identified in the broadcast data stream, for example, by a header ID, that file is acted upon by the program application. Each file will typically contain a still frame image and software for controlling the selection of new files broadcast. example, a presentation is provided which queries the user to make an additional selection. The user may select the core program will then search for the selection from the broadcast data files. The file selected will be identified by its file ID and then the video element displayed on the monitor. The program control elements of the data file provide the program application with the instructions necessary to act upon the other elements of the data file. The instructions may indicate that the video element is to be displayed in full or partial screen with a repeating audio element for a specified amount of time.

20

25

The number, placement, size of user interface buttons would also be indicated along with the action to be taken upon button selection. Actions may include executing an audio element, displaying a text element, loading and executing additional data files. The actions are activated with the controller. The files may be compressed such using MPEG or other compression technology. In the case of an MPEG compression system, six megabits of data may be transmitted per second. A data file will

-10-

variable in byte size. Thus over 60 files may be transmitted per second. The core program will identify files by the respective file ID as different files are requested, additional files will be identified by the program. Thus if the file ID is called for, the program will the presentation.

During the program application execution, end user responses are communicated upstream via the instructive call communication return path. This return path may comprise the CATV cable. Alternatively, the path may also comprise a modem dialer affixed to the phone system at the local premises which transmits messages to the central station.

The upstream return instruction is coded to identify all data files being accessed and the end user response thereto. The return information may be used to collect usage, statistics, notification and user requests or purchases. Additionally, the information transmitted by the CPE may dynamically adjust the frequency OF which a specific data file is broadcast by the broadcast data file server. Hence, if subscribers don't request certain information on a frequent enough basis, those files can be deleted from the system.

It is to be noted that the frequency with which a specific data file is delivered in the broadcast stream may be varied based upon an algorithm which determines the likelihood of need by any CPE. The core program may be instructed to identify and load a specific data file prior to it being needed based upon an algorithm which determines the likelihood it will be needed by the core program.

5

10

15

20

-11-

Figure 4 comprises a more detailed embodiment of the present invention as applied to a communication network. As shown, the system in a most preferred embodiment comprises three principal regions: the home/business; the transport network and the digital integration center. The home or business includes the set top/local server (CPE) 14, an MPEG (decoder) 17, CPU 16, memory 18, ports 20 and operating system 21. While the invention is shown in the context of an MPEG compression system, it is to be appreciated that other compression technologies may be used with the present invention.

5

10

15

20

25

The local CPE 14 communicates with a transport network including host digital terminal 31, a central office 33 and a Level I gateway 35. The host digital terminals are in communication with the gateway 35, CPE 14 and central office 37. The Level 1 Gateway 35 includes a network controller 36, video administration module 38 and statistics module 40.

The third major element is the digital integration center 42. This element includes the API (Applications Program Interface) 44 which includes the level II gateway server 46, text server 48, interactive response server 50, channel provisioning system (EPIC) 52, network coordinator 54 and statistics databases 56. The center 42 may include satellite receivers 58, off-air receivers 60, local origination 62, NVOD players 64, a multimedia applications server 66 and VOD (Video On Demand) server 68. The center also includes an MPEG encoder 70 and ATM encoder and MUX 72. The digital integration center functions as the central broadcast center which broadcasts the data files through the

-12-

central office and to the individual homes or businesses in the system. The end user may access an interactive presentation via the hand-held controller 15. The core program will be activated. The broadcast signal coming through the home/business will include files which will be accessible through the CPE 14.

Figure 5 is a flow diagram which displays the operation of the present invention. As shown, a provider transmits a broadcast video signal. A subscriber who desires to engage an interactive session transmits a service request via the hand-held IR controller or by activating buttons on the CPE. The provider then establishes an interactive response session and for example, instructs the CPE to perform a channel change and program application load instructions. The program application data file and the content data files are transmitted to the CPE via a broadcast signal. The subscriber can then query the provider for additional presentations which will be broadcast from the center.

Referring to Figures 6 through 8, examples of interactive presentations are shown and disclosed. Initially, the subscriber will input the interactive command in the controller. This can be accomplished by sending a signal or command to down-load the interactive presentation. The command can be input either with the hand-held tuner or by the activation of a button on the control box or CPE. In the following example there are three interactive presentations which are presented on the television monitor. A first is for the Asbury Park Press. A second is for the Franklin Mint. The third is for SHOP RITE Supermarkets.

Each of the presentations has an associated file number

5

10

15

20

-13-

which is used to identify the presentation in the broadcast stream.

Referring to Figure 6, the screen for the Franklin Mint is disclosed. The screen shows an advertisement for the Franklin Mint with a plurality of access items including an on-line catalog, a satisfaction guarantee, ordering and shipping information as well as a screen for new information.

5

10

15

20

25

The user will activate the particular presentation desired which will draw in a broadcast data. The presentation selected may be displayed. Additional screens may be accessed from the broadcast and shown on the screen. Further information may be accessed by transmitting a signal upstream. Additional information may then be broadcast to the CPE 14. It is to be noted that information does not have to be received upstream before the next file is accessed.

Figure 8 provides an example for incorporating a newspaper such as the Asbury Park Press into the system. In this example, the Asbury Press would provide a series of interactive presentations to subscribers of the system. These interactive presentations could include, for example, merchandise, pets, services, personals, real estate and transportation. A subscriber who, for example, desires to view a real estate presentation will activate the real estate command via the handheld controller.

A real estate presentation will then be shown to a subscriber on the TV monitor. If additional information is requested, a command can then be transmitted on the return path,

WO 95/34170

-14-

PCT/US95/07290

by the IR controller for example. The command alternatively could be transmitted via a modem, and additional presentations may then be broadcast and presented on the screen.

In yet a further example, a consumer may watch a program such as "CNN Money Line" in which a well known mutual fund manager may be describing the investment strategy of the fund. A text overlay will be displayed querying the consumer if he would like to have additional information via an interactive application.

By responding affirmatively using the remote control 15, the present invention will automatically switch the user to the application and later switch the consumer back to the original program when he is finished with the application. During the application, additional information can be given to the consumer is broadcast to the consumer in the form of files. If the consumer transmits a signal upstream, information on the consumer can be collected and transactions can be completed.

The examples of effective uses include services, products, information, insurance, travel. The ability to target interactive promotions, advertisements, and marketing efforts is enormous. The invention can identify consumers by demographics, geography, or programming viewing preferences.

The present invention has been described with reference to the above-detailed description. It is to be appreciated that other embodiments fulfill the spirit and scope of the present invention and that the true nature and scope of the present invention is to be determined with reference to the claims

5

10

15

20

-15-

appended hereto.

en de la composition La composition de la La composition de la

and the state of t

Claims

1. A method for facilitating interactive television by an end user comprising the following steps:

accessing a computer program for an interactive television display;

executing said interactive program so as to provide at least one screen display; and

providing a set of broadcast data files which may be accessed by said interactive program.

10

5

- 2. The method of claim 1 wherein said set of data files is transmitted on the vertical blanking interval of the video signal transmitted to said television.
- 3. The method of claim 1 wherein said interactive program is pre-stored in a computer memory associated with the end user.
 - 4. The method of claim 1 wherein the interactive program is transmitted on a second broadcast channel.

20

25

5. Apparatus for facilitating interactive television comprising:

means for accessing an interactive television application program and presentation a plurality of broadcast data files; and

means for controlling said program and broadcast files broadcast on a television monitor.

- 6. Apparatus for facilitating an interactive television session of claim 5 wherein said interactive presentation resides on a computer memory.
- 7. Apparatus for facilitating interactive television of claim 6 wherein said presentation is transmitted on a broadcast signal.
- 8. Apparatus of claim 7 wherein said data signal is transmitted through the vertical blanking interval.
 - 9. Apparatus of claim 7 wherein said signal is broadcast to a second broadcast channel.
- 10. Apparatus for facilitating interactive television comprising:

means for processing an interactive television application program said program being pre-stored in said computer memory;

means for accessing broadcast data files, each of said files corresponding to a presentation, and having an identification system associated therewith; and


25

means associated with said end user station for transmitting a set of instructions to a remote location to control the broadcast of new data files.


11. The apparatus of claim 10 wherein said end user station


is a television receiver.


12. The apparatus of claim 10 wherein said end user station is a computer and monitor.

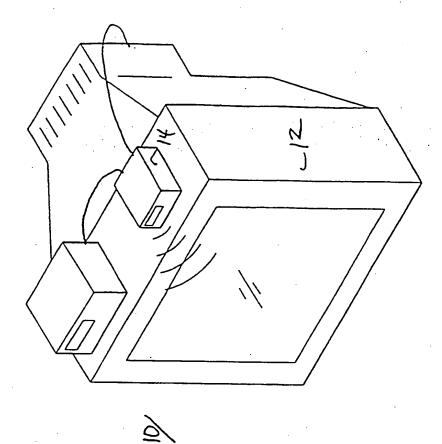








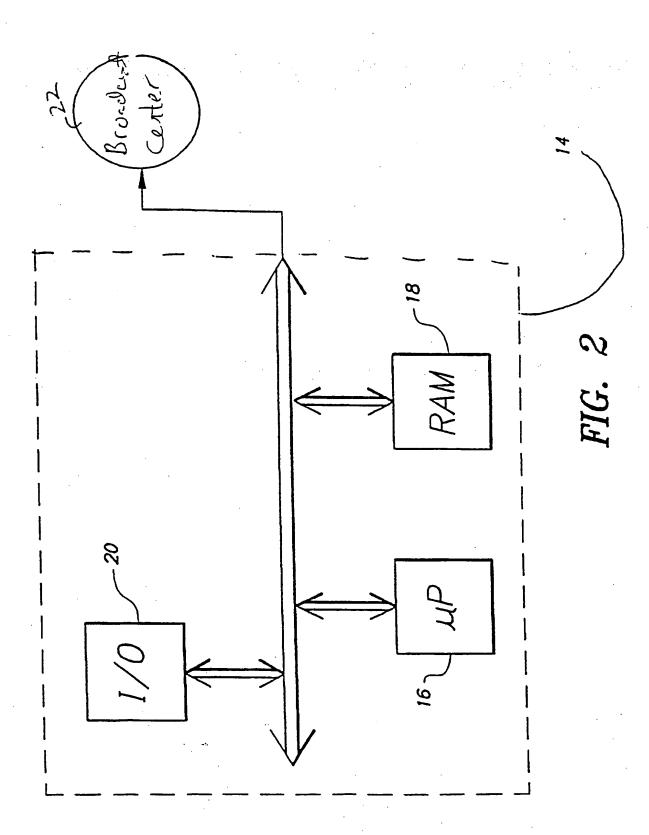


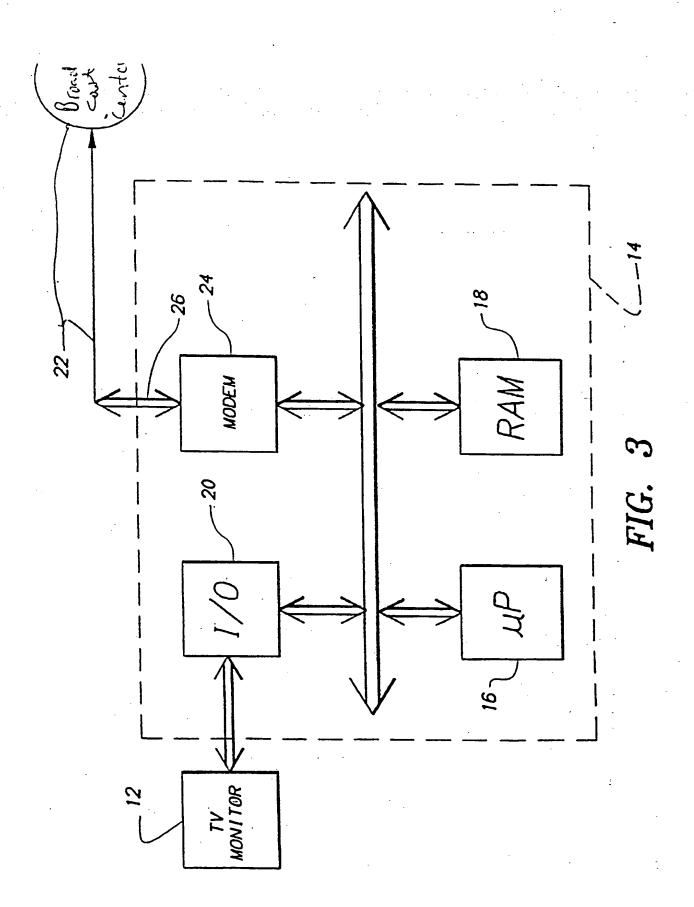

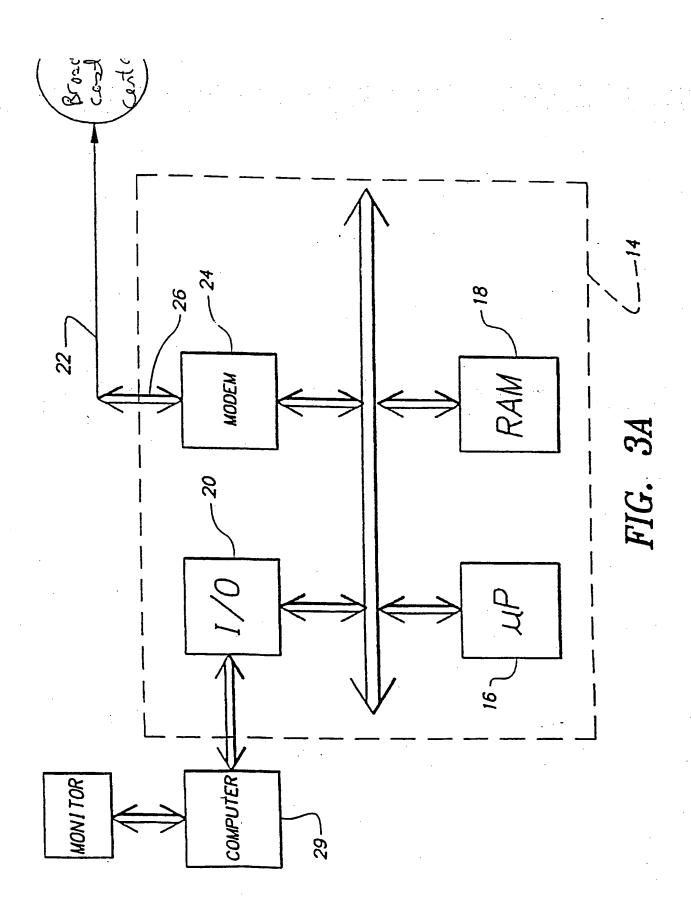


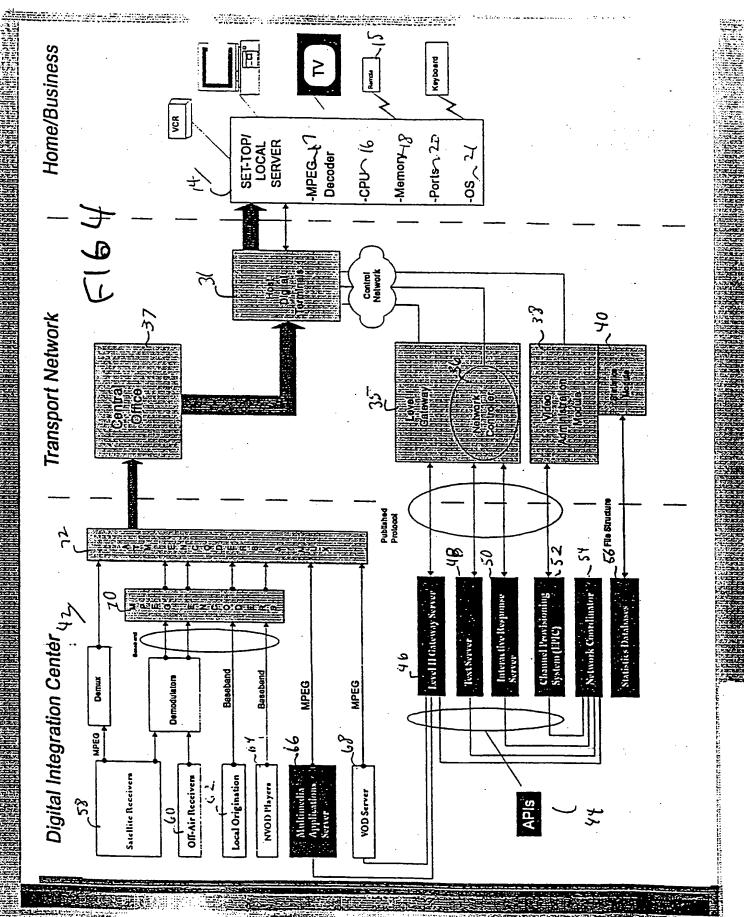


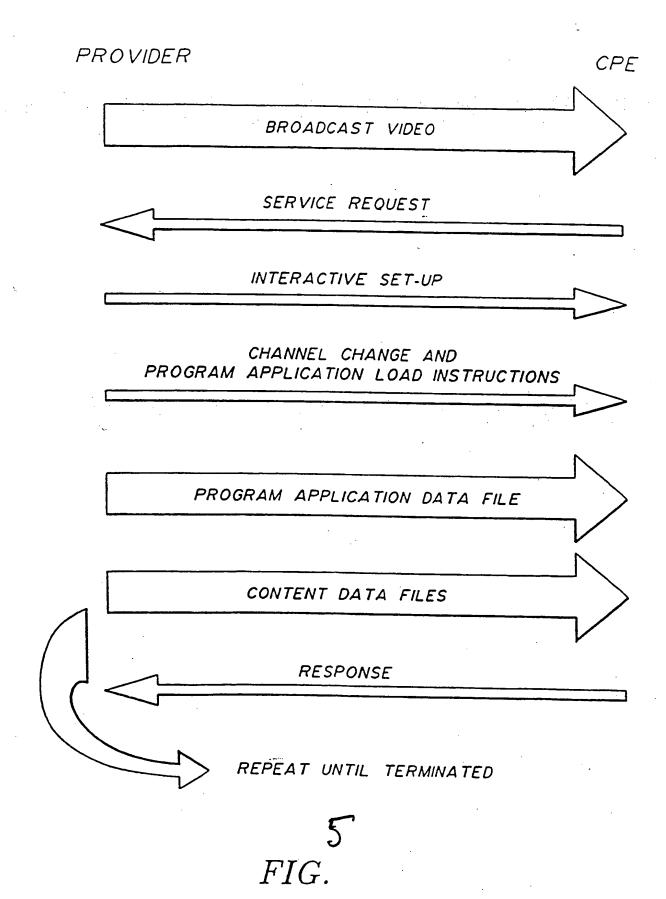

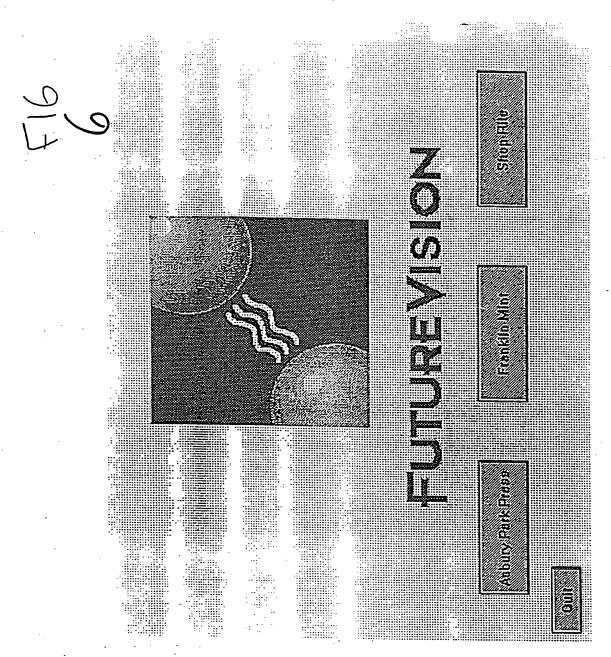

8/9

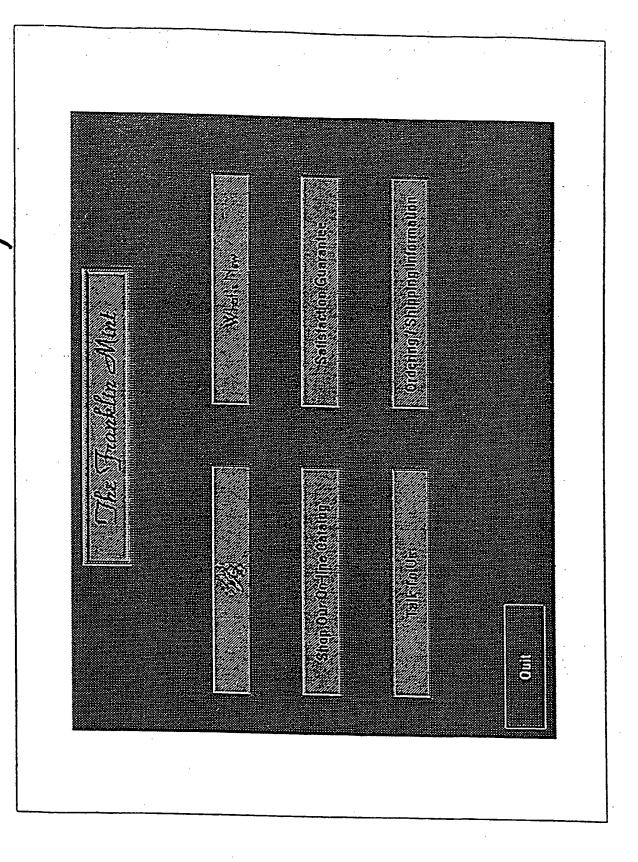

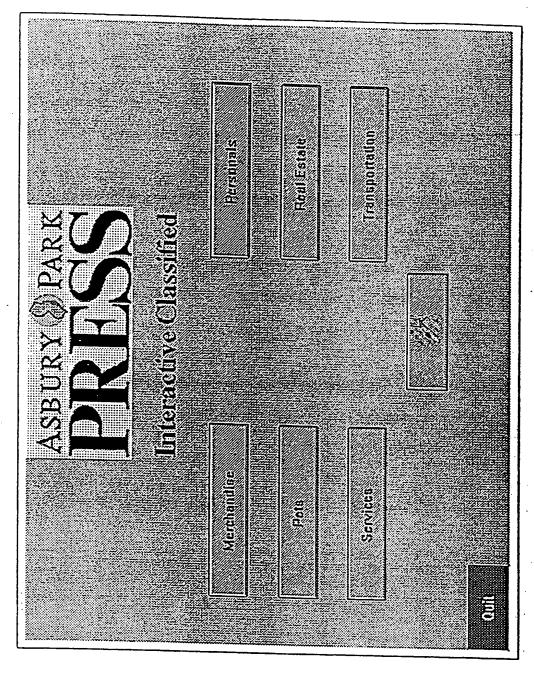

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) :H04N 7/173 US CL :Please See Extra Sheet.				
According to International Patent Classification (IPC) or to both national classification and IPC				
	LDS SEARCHED			
	documentation searched (classification system followe	d by classification symbols)		
U.S.: Please See Extra Sheet.				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages		Relevant to claim No.	
Y	US, A, 5,014,125 (POCOCK ET A lines 3-23.	AL) 7 May 1991, col. 18,	1-12	
Y,P	US, A, 5,357,276 (BANKER ET AL) 18 October 1994, see whole document and figures 1, 2a, 2b, 3, and 5a.		1-12	
		:		
			•	
			<u> </u>	
Further documents are listed in the continuation of Box C. See patent family annex.				
Special categories of cited documents: "T" later document published after the international filing date or priority			mational filing date or priority	
"A" document defining the general state of the art which is not considered to be part of particular relevance data and not in conflict with the application but cited to understand to be part of particular relevance				
"E" earlier document published on or after the international filing date "X" document of particular		"X" document of particular relevance; the considered novel or cannot be consider		
	cument which may throw doubts on priority claim(s) or which is ed to establish the publication date of another citation or other	when the document is taken alone		
O. qo	pecial reason (as specified) "Y" document of particular relevance; the claimed invention cannot b considered to involve an inventive step when the document combined with one or more other such documents, such combination		step when the document is a documents, such combination	
"P" do	being obvious to a person skilled in the art cument published prior to the international filing date but later than "&" document member of the same patent family priority date claimed			
Date of the actual completion of the international search Date of mailing of the international search report				
20 JULY 1995		22SEP1995		
		Authorized officer		
Commissioner of Patents and Trademarks Box PCT		JOHN W. MILLER		
Washington, D.C. 20231 - :-		Telephone No. (703) 205 4700		

Form PCT/ISA/210 (second sheet)(July 1992)★

INTERNATIONAL SEARCH REPORT

International application No. PCT/US95/07290

A. CLASSIFICATION OF SUBJECT MATTER: US CL $\,:\,$

348/7, 13; 455/4.2, 5.1

B. FIELDS SEARCHED
Minimum documentation searched
Classification System: U.S.

348/6, 7, 8, 10, 11, 12, 13; 455/3.1, 3.2, 3.3, 4.1, 4.2, 5.1, 6.1, 6.2, 6.3; H04N 7/16, 7/169, 7/173

This Page Blank (uspto)

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
☐ FADED TEXT OR DRAWING
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
☐ GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
O company

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)